

STEP 1 - Operation Instructions





MDSE03-2 SPIN PEDAL MOP


INSTRUCTION MANUAL

SET INCLUDES


- 1 X bucket
- 1 X 4 section pole handle
- 1 X triangle mop plate
- 2 X triangle mop pads

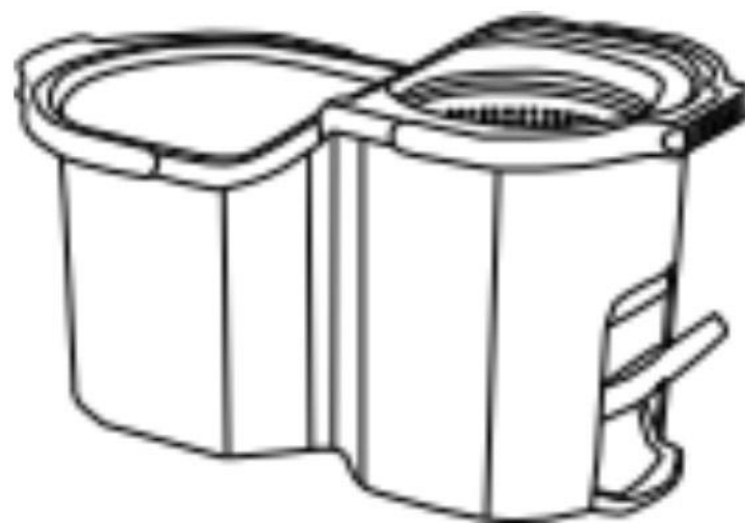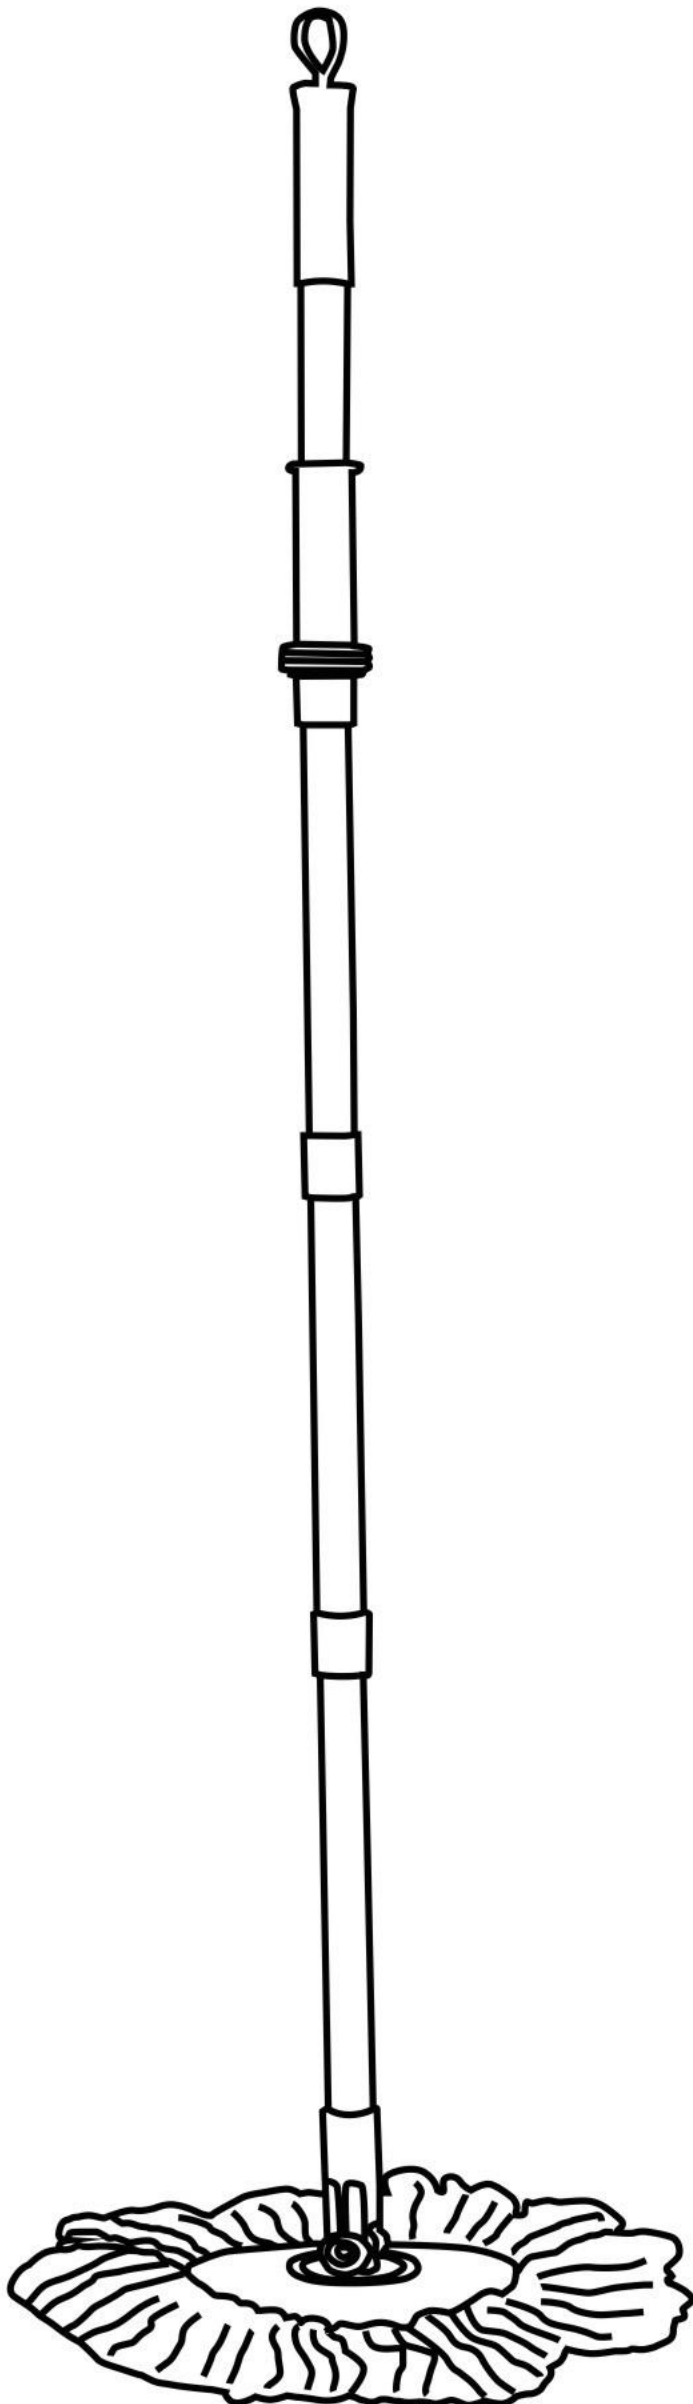

STEP 2 - ASSEMBLY INSTRUCTIONS

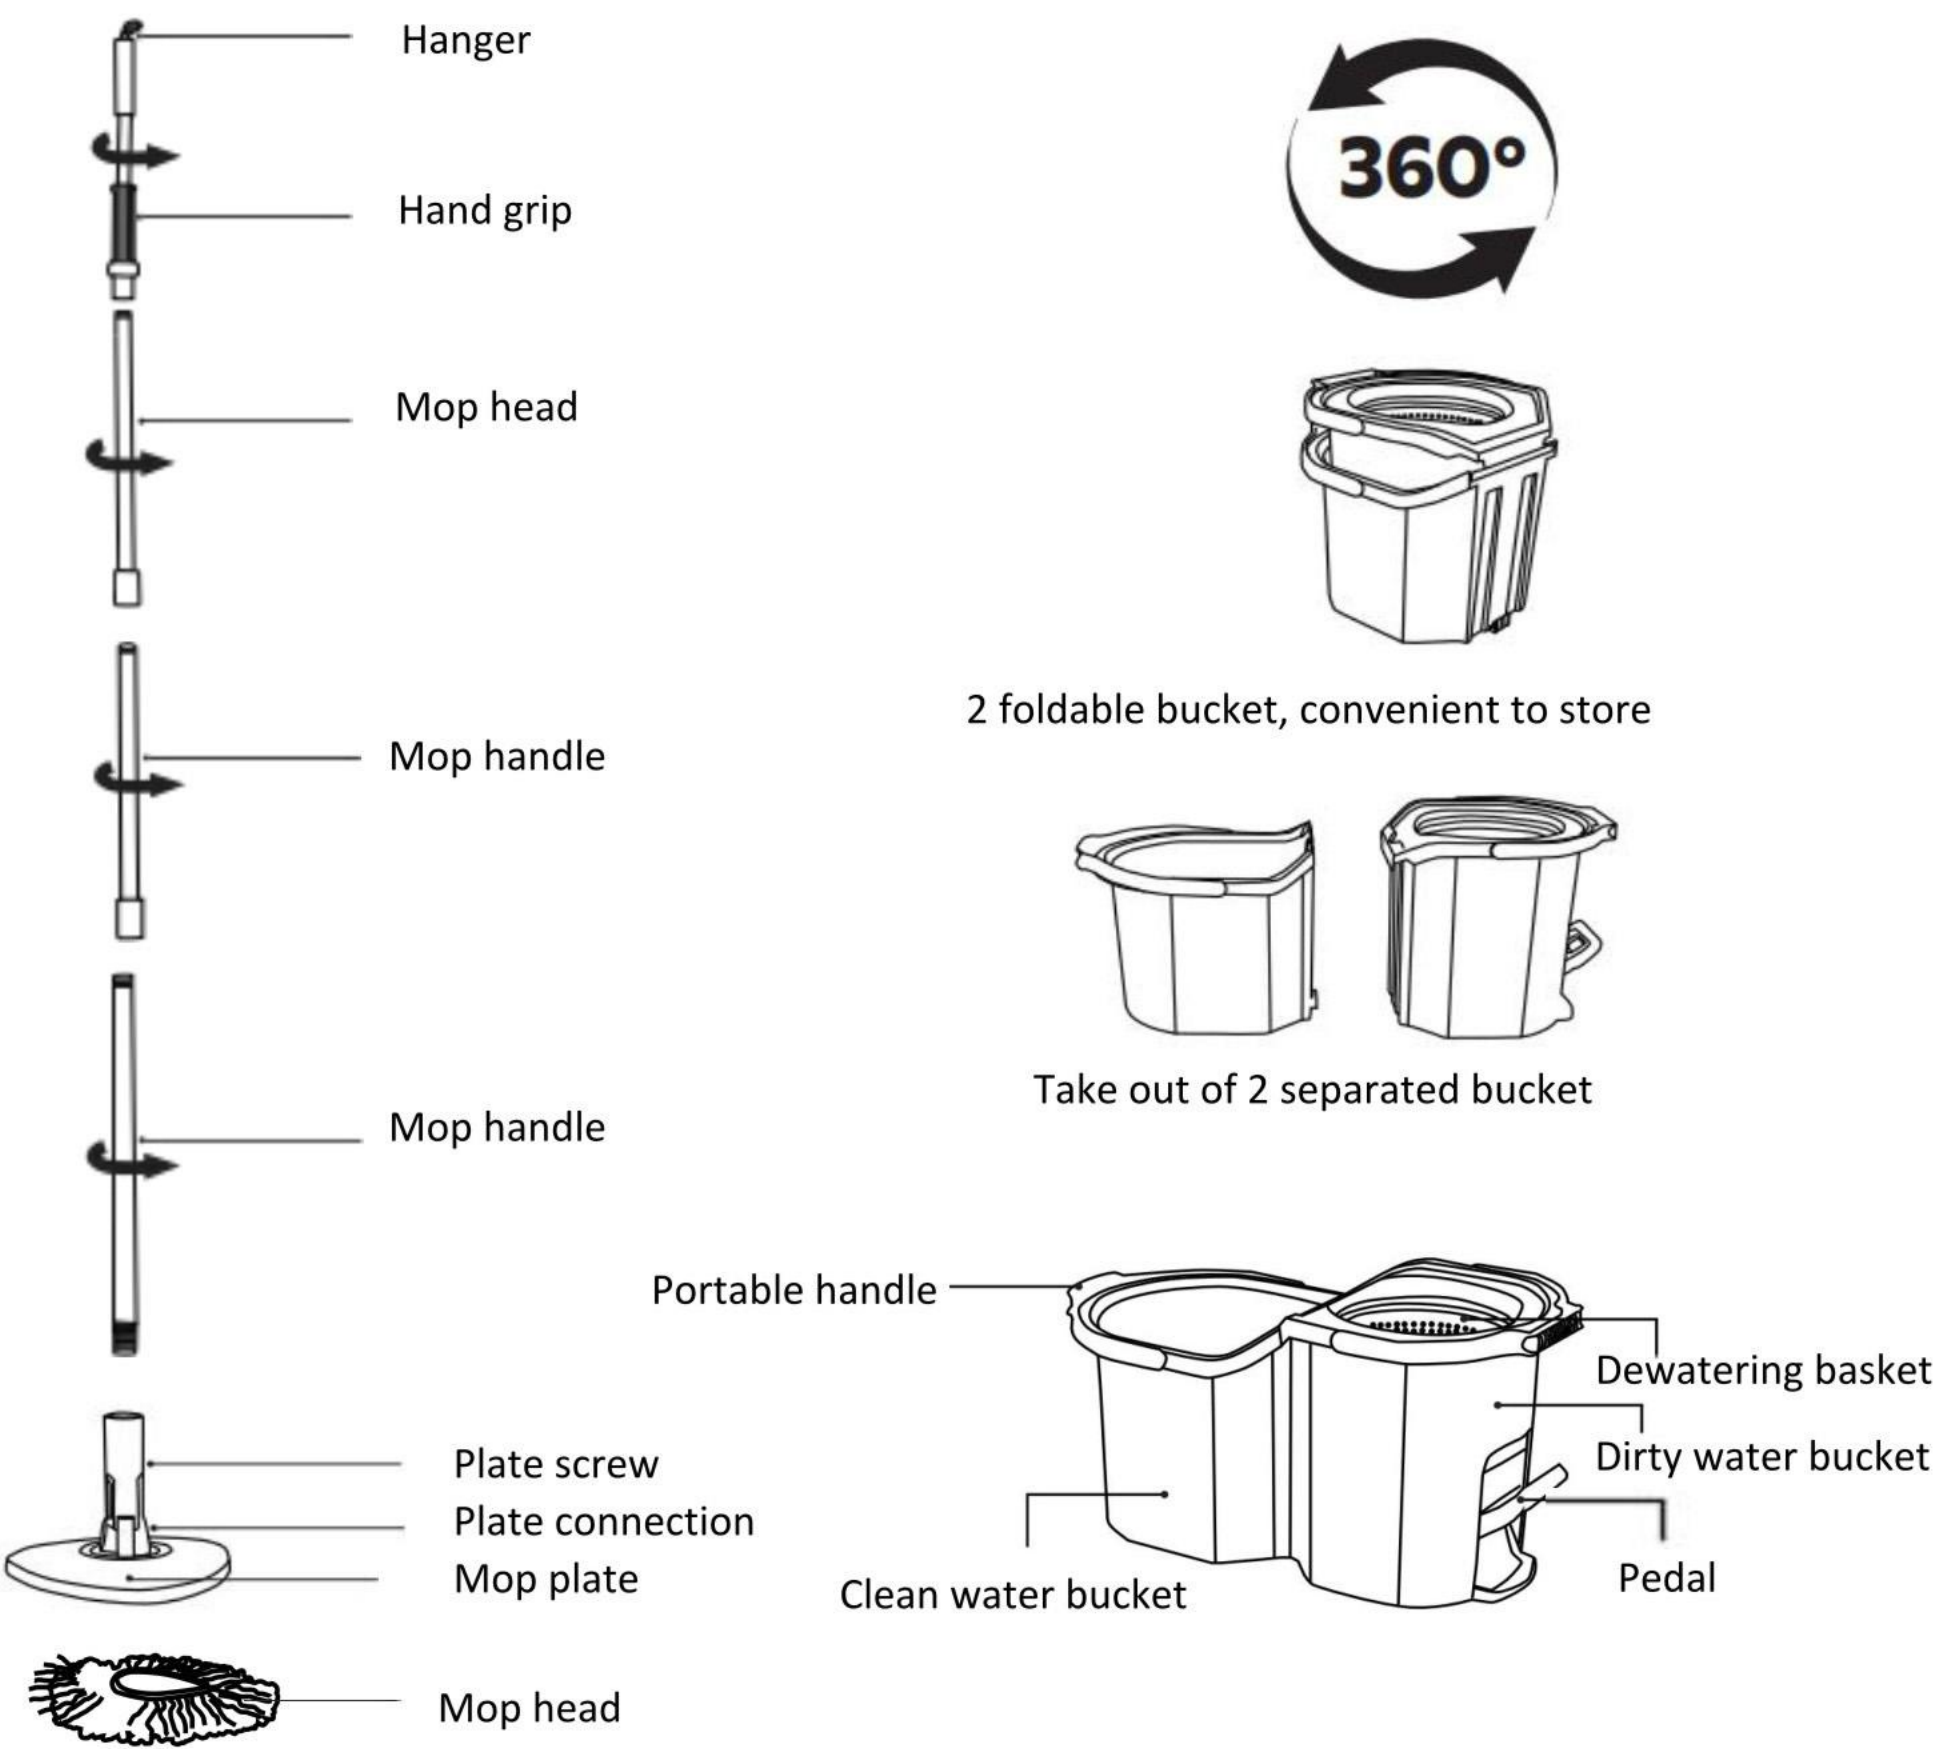


STEP 3 - ASSEMBLE

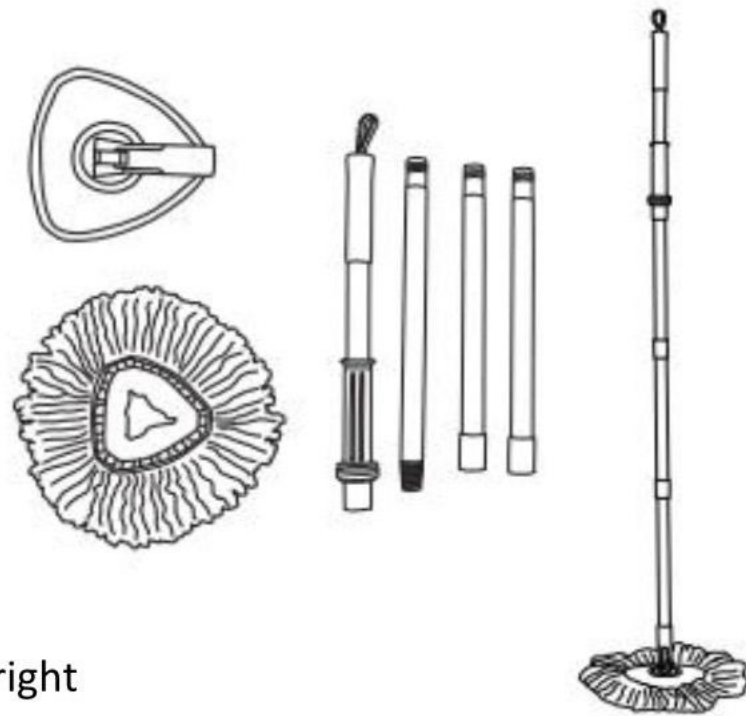

1. Connect mop plate with mop pads
2. Insert the pole then turn the screw to right


STEP 4 - ATTACH MICROFIBER PAD

1. Operate it on dry and flat floor
2. Match the disk and mop pads then step on the disk to connect them tightly
3. It's done when you hear the sound “click”

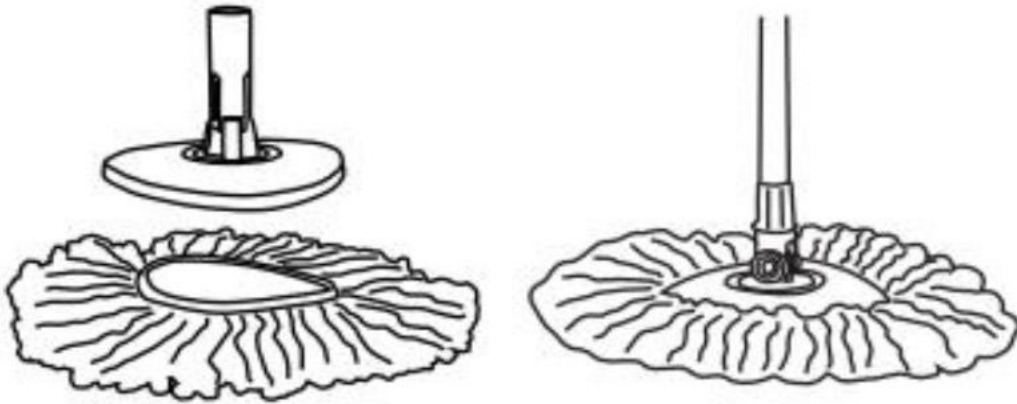


STEP 5 - CHANGE MICROFIBER PAD

1. Step on the threads of the mop pads near the edge of the disk
2. Push the mop handle in the opposite direction with your body
3. Separate the plate from the mop pads

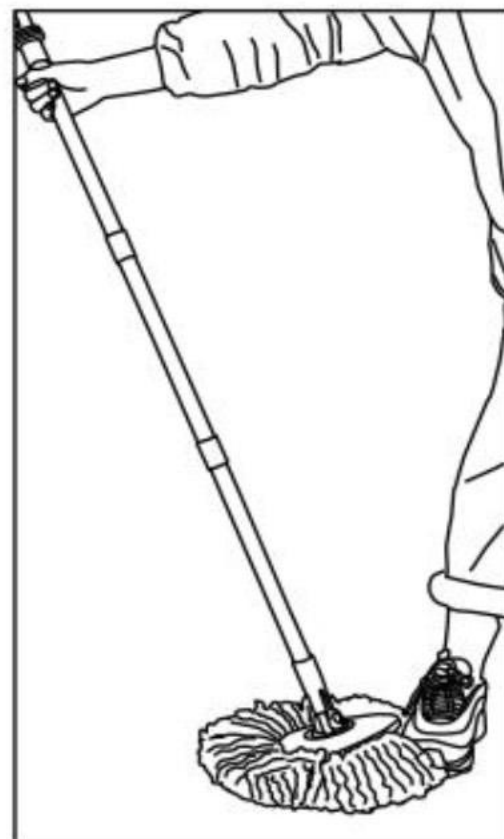



STEP6 - WASH AND DRY

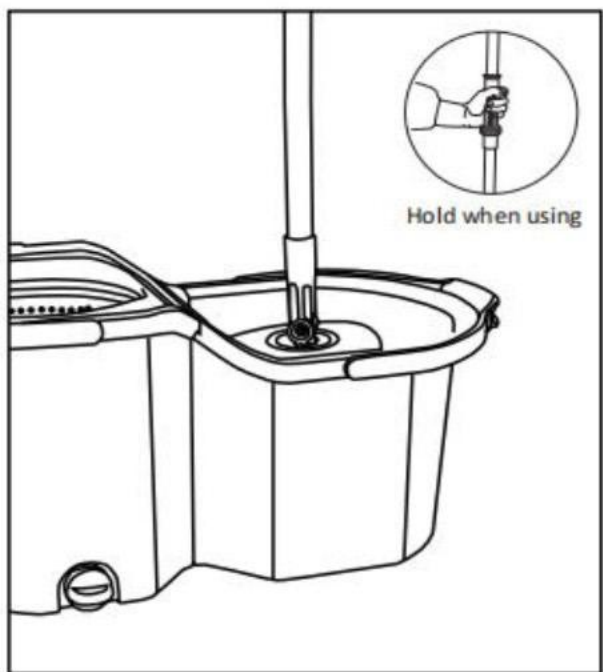

1. Load fresh water in clean bucket,hold the handle then put it in CLEAN bucket to wash mop head




2. Move the mop pads to the basket. Holding the handle downward to use with pedal to accelerate the rotating speed of the head. Manage the rotation speed to control the wetness of the mop as per requirement.

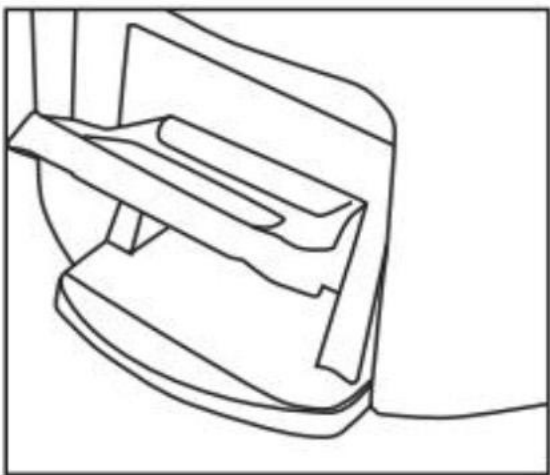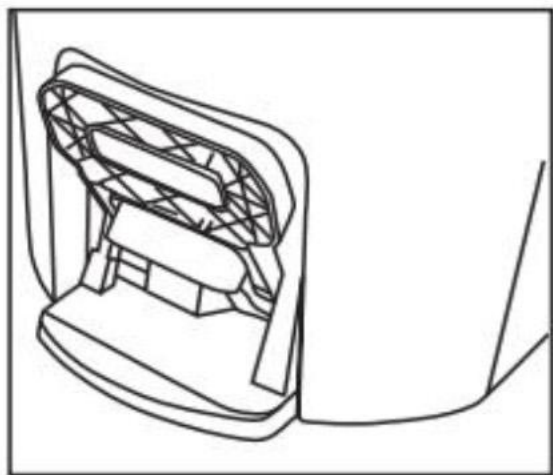

Please remember to release the folded pedal before use!

STEP7 - EMPTY BUCKET

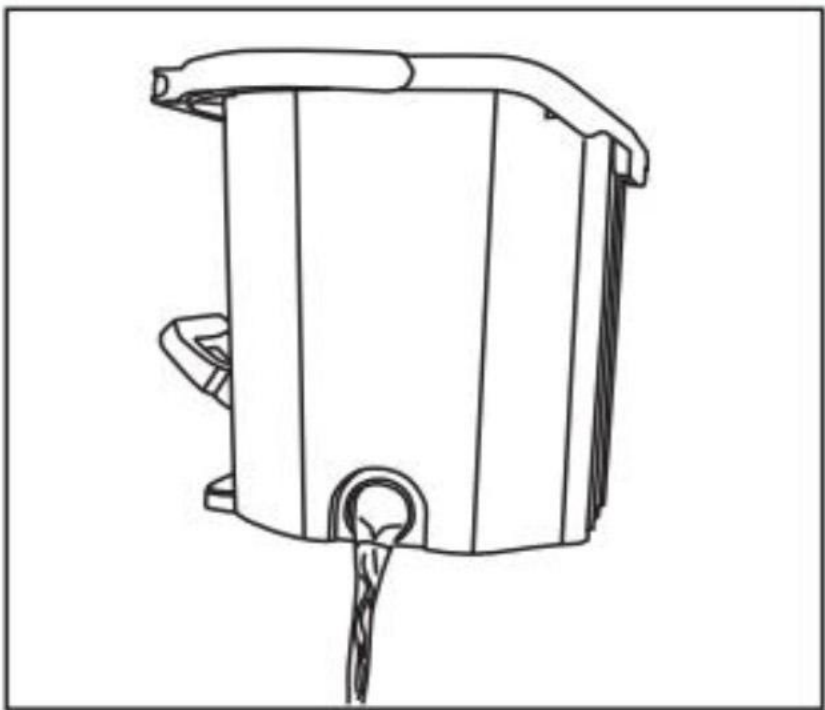

When the height of the dirty water is consistent with stainless steel basket means dirty water is full, open the drain to release dirty water